




Ground Screw


Assembly

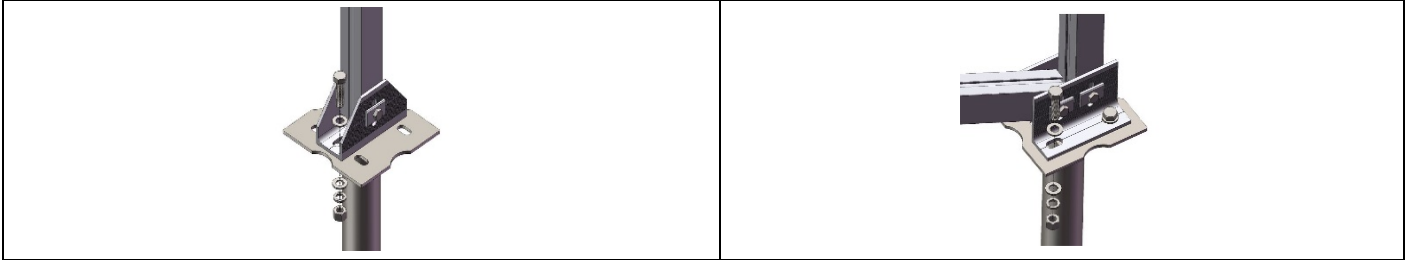

Component

	
PV-ezRack Ground Screw $\varnothing 76 \times 3.5$, with Quadrat flange and Continuous Small blade Part No.: GS-76/3.5/13-F0 (/GS-76/3.5/16-F0)	Hexagonal Bolt M16*50, with nut and washer Part No.: ER-HB-ST16/50A

Technical Specification

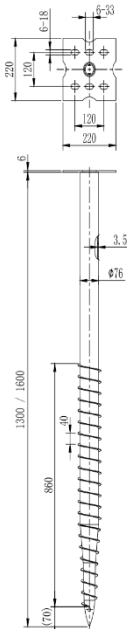Application	Compatible with Clenergy SolarTerrace III-A	
Requirement	Suitable for sand and clay soil	
Pipe Length	1300mm / 1600mm	
Weight	GS-76/3.5/13-F0: 10.351kg GS-76/3.5/16-F0: 12.126kg ER-HB-ST16/50A: 0.166kg	
Packaging	Ground Screw: 56 PCS per pallet Fasteners: 150 units per carton	
Minimum of Quantity	4 pallets (224 PCS) per length	
Material	Main Structure: Hot-dip Galvanized Steel (Q235B) at 85 microns in average Fasteners: SUS 304	
Color	Silver	
Standard	AS NZS1170.2-2011	