



MONO HALF-CUT MODULE UL-450 | 455 | 460M-144HV

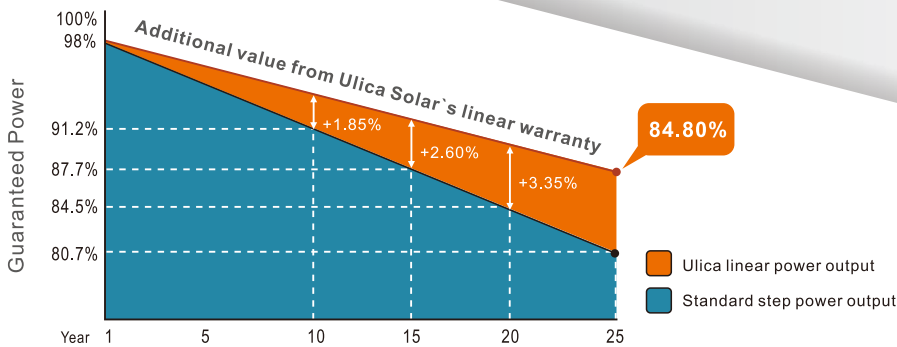

Global Tier 1 brand as announced by Bloomberg NEF

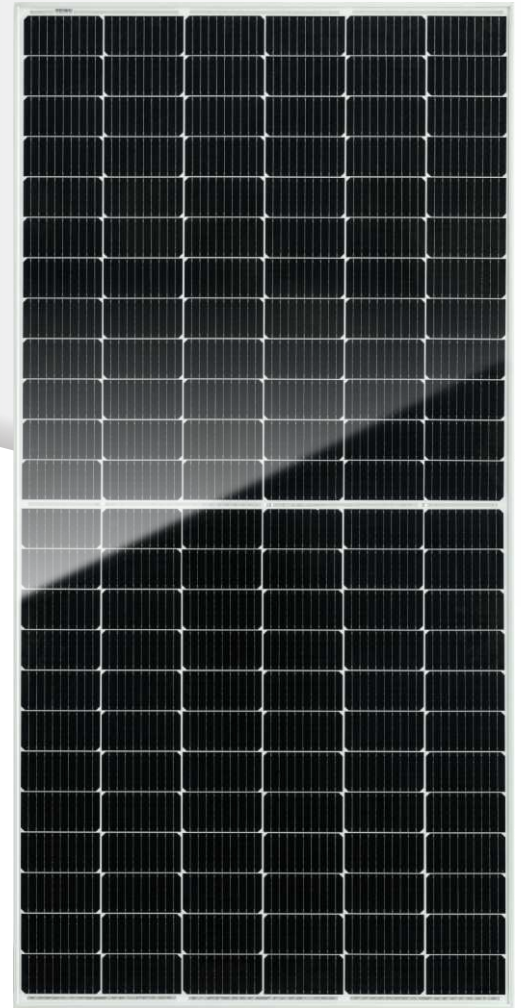

Lower LCOE
Lower shading and resistive loss
Lower temperature coefficient



Outstanding mechanical load resistance
3800 Pa wind load, 5400 Pa snow load



Anti-PID (potential induced degradation)
Passed anti-PID test under 85% damp heat, 85% relative humidity for 96 hours



Great Durability against extreme conditions
Passed salt mist corrosion test, ammonia corrosion test, dust & sand test, fire test, all certified by TUV



CEC Listed



- IEC 61215, IEC 61730
- ISO 9001: 2015 (Quality management systems)
- ISO 14001: 2015 (Environmental management systems)
- ISO 45001: 2018 (Occupational health and safety)
- UNI 9177 Ia CLASSE DI REAZIONE AL FUOCO:1

MONO UL-450 | 455 | 460M-144HV



ELECTRICAL PERFORMANCE

Electrical Parameters Standard Test Conditions

Module Type	UL-450M-144HV		UL-455M-144HV	UL-460M-144HV	
Power Output	P _{max}	W	450	455	460
Power Tolerance	ΔP _{max}	W	0/+5W		
Module Efficiency	η _m	%	20.70	20.93	21.16
Voltage at P _{max}	V _m	V	41.0	41.1	41.2
Current at P _{max}	I _m	A	10.98	11.07	11.17
Open-Circuit Voltage	V _{oc}	V	49.8	49.9	50.0
Short-Circuit Current	I _{sc}	A	11.55	11.64	11.74

STC:1000W/m² irradiance,25C module temperature,AM1.5

THERMAL CHARACTERISTICS

Nominal Operating Cell Temperature	NOCT	°C	43±2
Temperature Coefficient of P _{max}	γ	%/°C	-0.340
Temperature Coefficient of V _{oc}	β _{voc}	%/°C	-0.290
Temperature Coefficient of I _{sc}	α _{isc}	%/°C	+0.049

OPERATING CONDITIONS

Max.System Voltage	DC1500V
Max.Series Fuse Rating	20A
Operating Temperature Range	-40°C~85°C
Max static snow load	5400Pa
Max static wind load	3800Pa
Application Class	A

CONSTRUCTION MATERIALS

Front Cover(material/type/thickness)	low-iron tempered glass/3.2mm
Cell(quantity/material/type/dimension)	144/monocrystalline/166X83mm
Encapsulant(material)	ethylene vinyl acetate(EVA)
Frame(material/anodization color)	anodized aluminum alloy/silver or black
Junction Box(protection degree)	IP68
Cable(length/cross-sectionalarea)	4mm ²
	Landscape: (+) 1300mm/(-)1300 mm Portrait: (+)400 mm/(-) 200mm
Plug Connector	MC4 compatible

GENERAL CHARACTERISTICS

Dimension(L/W/H)	2094/1038/35mm
Weight	23.3kg

PACKING CONFIGURATION


Pallet Size(L/W/H)	2134/1130/2350mm
Pallet Weight	1526kg
Pieces per Pallet	62pcs
Pieces per Container	682pcs

INTERNATIONAL CERTIFICATES



- IEC 61215, IEC 61730
- ISO 9001: 2015(Quality management systems)
- ISO 14001: 2015 (Environmental management systems)
- ISO 45001: 2018 (Occupational health and safety)
- UNI 9177 Ia CLASSE DI REAZIONE AL FUOCO:1

I-V CURVE

I-V characteristics at different irradiances

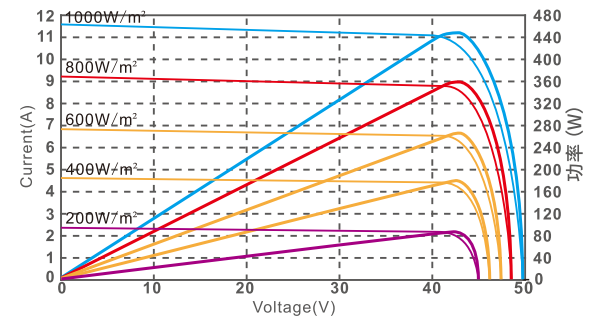

I-V characteristics at different temperature

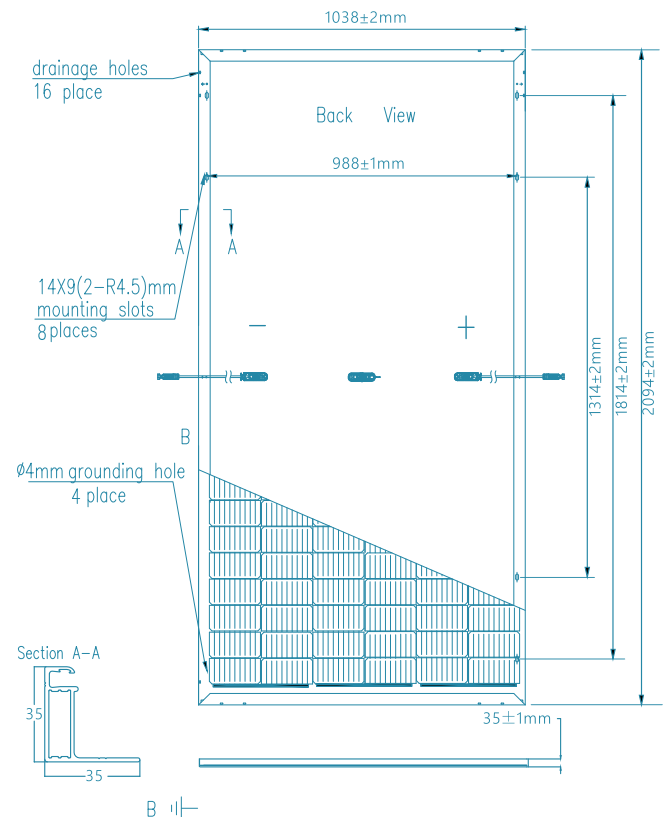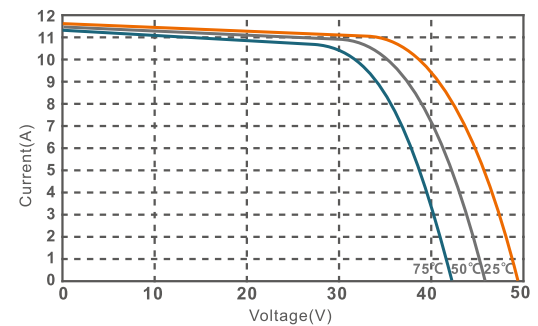

Please read the instruction entirely before handling, installing and operating Ulica Solar modules.

Due to continuous research and development, the specification is subject to change without prior notice.